


# TSUBAKI ANSI RS ROLLER CHAINS

## RS11SS STAINLESS STEEL CHAIN-PITCH 3.7465 mm

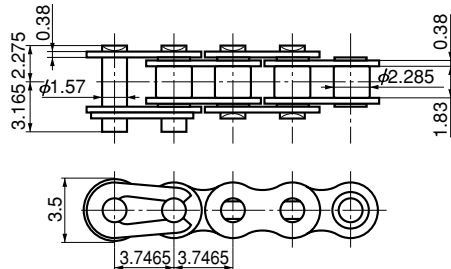


(Dimensions in mm)

TSUBAKI Chain No.	Ave. Tensile Strength kN(kgf)	Max. Allowable Load kN(kgf)	Approx. Mass kg/m	No. of Links/Unit
<b>RS 11SS</b>	780 (80)	50 (5)	0.052	134

**Note :** 1. Chain will be supplied in lengths of 134 links (Approx. 500 mm) including a connecting link, unless otherwise specified.  
2. No offset links are available.

## RS15-PITCH 4.7625 mm

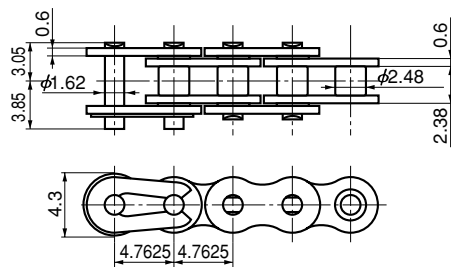

(Dimensions in mm)

TSUBAKI Chain No.	Ave. Tensile Strength kN(kgf)	Max. Allowable Load kN(kgf)	Approx. Mass kg/m	No. of Links/Unit
<b>RS 15</b>	2.26 (230)	0.31 (32)	0.075	210

**Note :** 1. Chain will be supplied in lengths of 210 links (Approx. 1.0 meter) including a connecting link, unless otherwise specified.  
2. No offset links are available.