



RS140-PITCH 44.45 mm

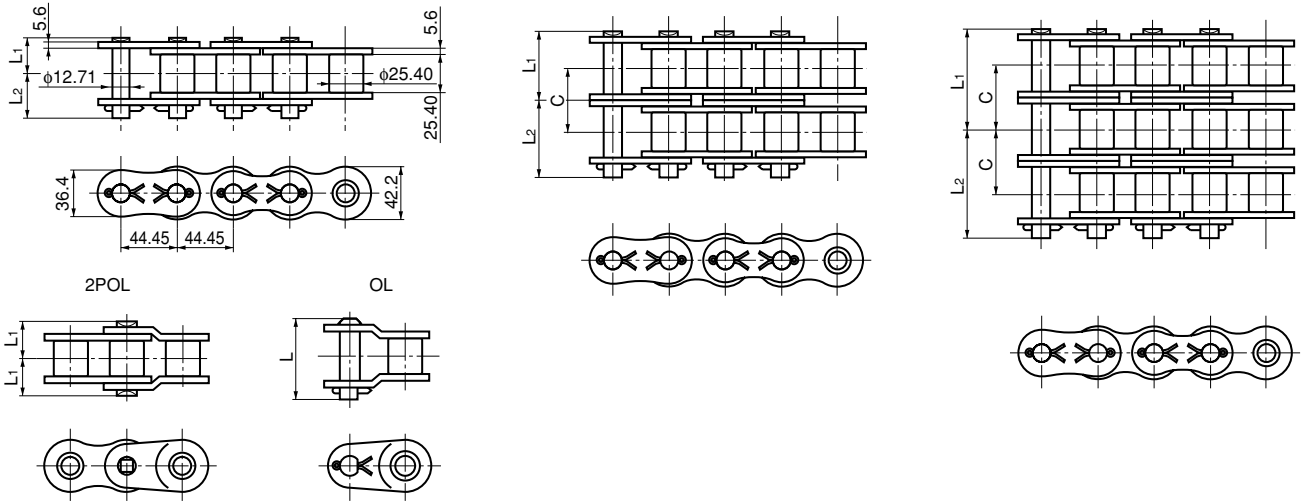

(Dimensions in mm)

TSUBAKI Chain No.	Number of Strands	Pin				Transverse Pitch C	Standard Type of Pin	Min. Ultimate Strength ANSI Standard kN(kgf)	Ave. Tensile Strength kN(kgf)	Max. Allowable Load kN(kgf)	Approx. Mass kg/m	No. of Links/Unit
		L1 + L2	L1	L2	L							
RS 140	1	58.6	26.9	31.7	59.5	48.9	Cottered	185.9 (18,957)	216 (22,000)	40.2 (4,100)	7.49	68
RS 140-2	2	107.5	51.35	56.15	112.3		Cottered	371.8 (37,913)	431 (44,000)	68.4 (6,970)	14.83	
RS 140-3	3	156.6	75.85	80.75	161.3		Cottered	557.7 (56,870)	647 (66,000)	101 (10,250)	22.20	
RS 140-4	4	205.5	100.3	105.2	210.2		Riveted	676.0 (68,932)	863 (88,000)	133 (13,530)	28.52	
RS 140-5	5	254.4	124.8	129.6	259.1		Riveted	845.0 (86,165)	1,080 (110,000)	157 (15,990)	36.97	
RS 140-6	6	303.5	149.3	154.2	308.0		Riveted	1,014.0 (103,398)	1,290 (132,000)	185 (18,860)	44.30	

RS160-PITCH 50.80 mm

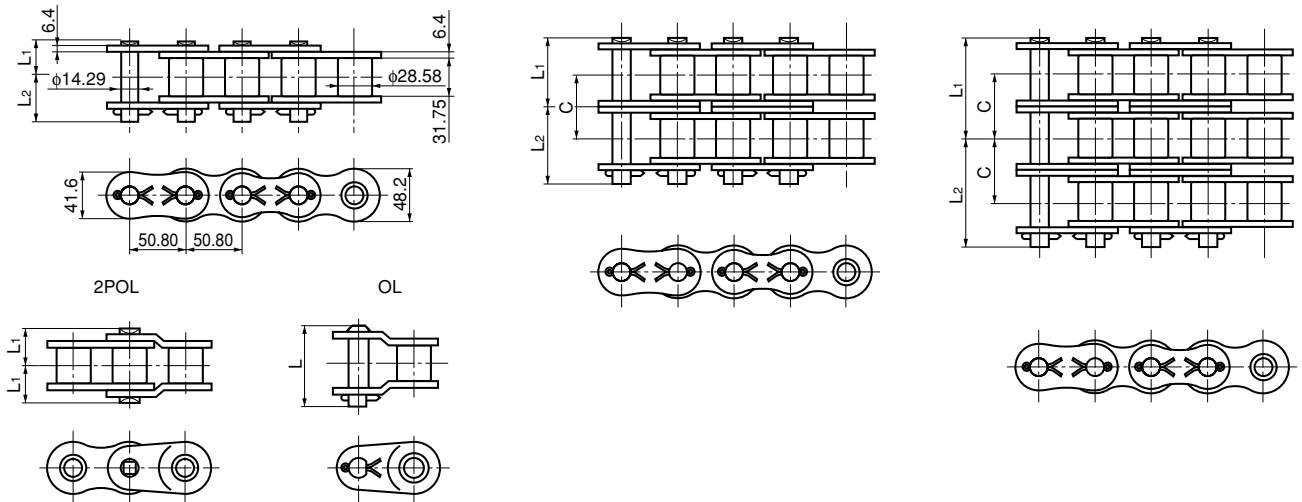

(Dimensions in mm)

TSUBAKI Chain No.	Number of Strands	Pin				Transverse Pitch C	Standard Type of Pin	Min. Ultimate Strength ANSI Standard kN(kgf)	Ave. Tensile Strength kN(kgf)	Max. Allowable Load kN(kgf)	Approx. Mass kg/m	No. of Links/Unit
		L1 + L2	L1	L2	L							
RS 160	1	68.7	31.85	36.85	71.0	58.5	Cottered	244.6 (24,942)	279 (28,500)	53.0 (5,400)	10.10	60
RS 160-2	2	127.3	61.15	66.15	132.2		Cottered	489.2 (49,885)	559 (57,000)	90.0 (9,180)	20.04	
RS 160-3	3	185.9	90.45	95.45	190.7		Cottered	733.8 (74,827)	838 (85,500)	132 (13,500)	30.02	
RS 160-4	4	244.4	119.75	124.65	249.2		Riveted	889.6 (90,712)	1,120 (114,000)	175 (17,820)	40.06	
RS 160-5	5	303.0	149.05	153.95	307.7		Riveted	1,112.0 (113,390)	1,400 (142,500)	207 (21,060)	49.89	
RS 160-6	6	361.6	178.3	183.3	366.2		Riveted	1,334.4 (136,068)	1,680 (171,000)	244 (24,840)	59.93	