



RS180-PITCH 57.15 mm

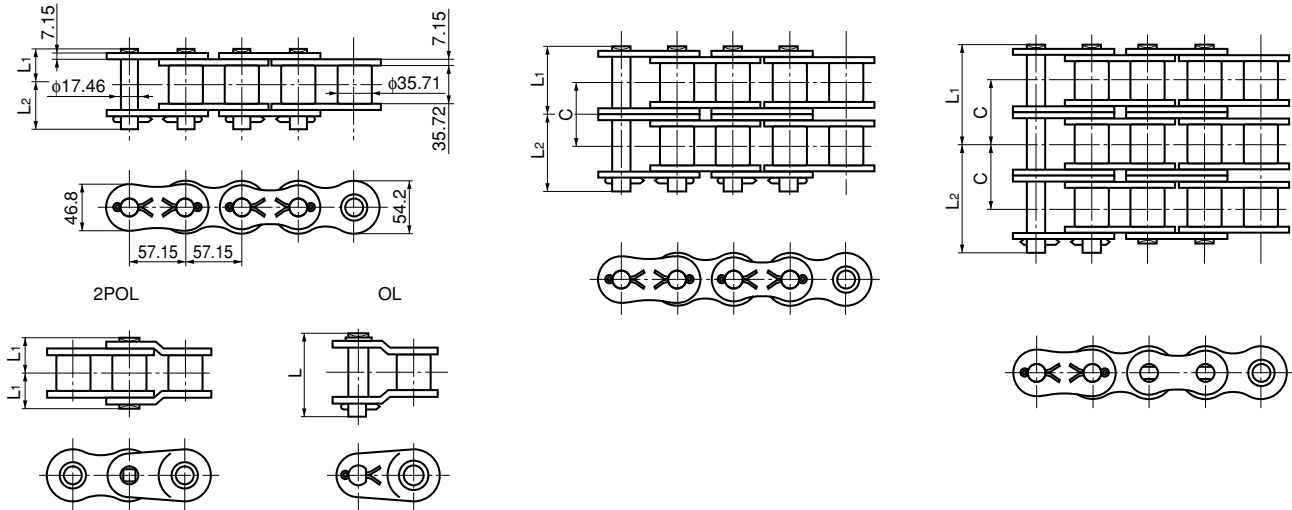

(Dimensions in mm)

| TSUBAKI Chain No. | Number of Strands | Pin | | | | Transverse Pitch C | Standard Type of Pin | Min. Ultimate Strength ANSI Standard kN(kgf) | Ave. Tensile Strength kN(kgf) | Max. Allowable Load kN(kgf) | Approx. Mass kg/m | No. of Links/Unit |
|-------------------|-------------------|---------|--------|--------|-------|--------------------|----------------------|--|-------------------------------|-----------------------------|-------------------|-------------------|
| | | L1 + L2 | L1 | L2 | L | | | | | | | |
| RS 180 | 1 | 78.1 | 35.65 | 42.45 | 80.6 | 65.8 | Cottered | 308.2 (31,428) | 370 (37,700) | 60.8 (6,200) | 13.45 | 54 |
| RS 180-2 | 2 | 144.1 | 68.75 | 75.35 | 151.1 | | Cottered | 616.4 (62,885) | 739 (75,400) | 103 (10,540) | 26.52 | |
| RS 180-3 | 3 | 210.2 | 101.7 | 108.5 | 216.9 | | Riveted | 924.6 (94,283) | 1,110 (113,100) | 152 (15,500) | 38.22 | |
| RS 180-4 | 4 | 276.1 | 134.65 | 141.45 | 282.8 | | Riveted | — | 1,480 (150,800) | 201 (20,460) | 50.90 | |
| RS 180-5 | 5 | 342.0 | 167.6 | 174.4 | 348.6 | | Riveted | — | 1,850 (188,500) | 237 (24,180) | 63.59 | |
| RS 180-6 | 6 | 407.9 | 200.55 | 207.35 | 414.4 | | Riveted | — | 2,180 (226,200) | 280 (28,520) | 76.27 | |

RS200-PITCH 63.50 mm

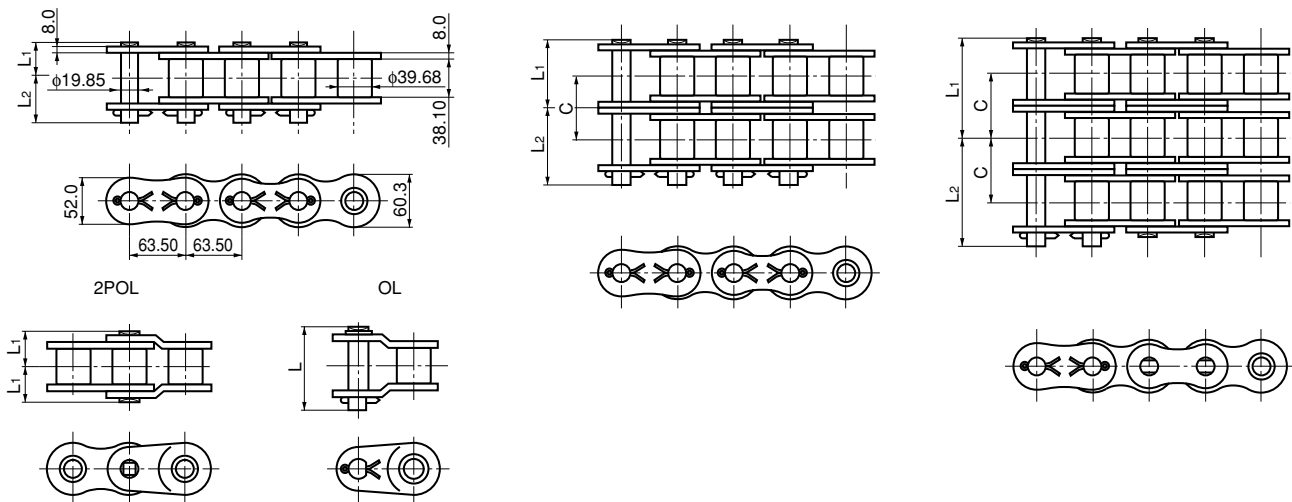

(Dimensions in mm)

| TSUBAKI Chain No. | Number of Strands | Pin | | | | Transverse Pitch C | Standard Type of Pin | Min. Ultimate Strength ANSI Standard kN(kgf) | Ave. Tensile Strength kN(kgf) | Max. Allowable Load kN(kgf) | Approx. Mass kg/m | No. of Links/Unit |
|-------------------|-------------------|---------|--------|--------|-------|--------------------|----------------------|--|-------------------------------|-----------------------------|-------------------|-------------------|
| | | L1 + L2 | L1 | L2 | L | | | | | | | |
| RS 200 | 1 | 83.8 | 39.0 | 44.8 | 87.3 | 71.6 | Cottered | 381.7 (38,923) | 471 (48,000) | 71.6 (7,300) | 16.49 | 48 |
| RS 200-2 | 2 | 155.5 | 74.85 | 80.65 | 161.2 | | Cottered | 763.4 (77,845) | 941 (96,000) | 122 (12,410) | 32.63 | |
| RS 200-3 | 3 | 227.2 | 110.75 | 116.45 | 233.0 | | Riveted | 1,145.1 (116,768) | 1,410 (144,000) | 179 (18,250) | 49.02 | |
| RS 200-4 | 4 | 298.9 | 146.6 | 152.3 | 304.7 | | Riveted | 1,388.0 (141,536) | 1,880 (192,000) | 236 (24,090) | 65.16 | |
| RS 200-5 | 5 | 370.6 | 182.4 | 188.2 | 376.3 | | Riveted | 1,735.0 (176,920) | 2,350 (240,000) | 279 (28,470) | 81.32 | |
| RS 200-6 | 6 | 442.3 | 218.25 | 224.05 | 448.0 | | Riveted | 2,082.2 (212,304) | 2,820 (288,000) | 329 (33,580) | 97.59 | |