



## RS40-PITCH 12.70 mm

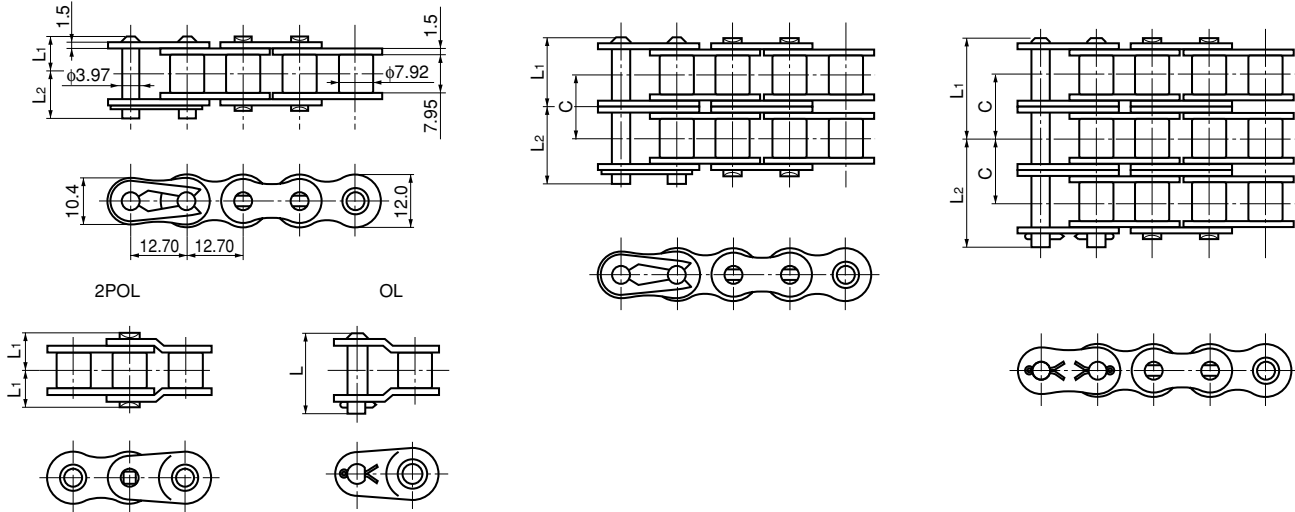

(Dimensions in mm)

TSUBAKI Chain No.	Number of Strands	Pin				Transverse Pitch C	Standard Type of Pin	Min. Ultimate Strength ANSI Standard kN(kgf)	Ave. Tensile Strength kN(kgf)	Max. Allowable Load kN(kgf)	Approx. Mass kg/m	No. of Links/Unit
		L1 + L2	L1	L2	L							
<b>RS 40</b>	1	18.2	8.25	9.95	18.0	14.4	Riveted	15.2 (1,550)	19.1 (1,950)	3.63 (370)	0.64	240
<b>RS 40-2</b>	2	32.6	15.45	17.15	33.5		Riveted	30.4 (3,100)	38.2 (3,900)	6.18 (630)	1.27	
<b>RS 40-3</b>	3	46.8	22.65	24.15	47.9		Riveted	45.6 (4,650)	57.4 (5,850)	9.12 (930)	1.90	
<b>RS 40-4</b>	4	61.2	29.9	31.3	62.3		Riveted	55.2 (5,628)	76.5 (7,800)	12.0 (1,220)	2.53	
<b>RS 40-5</b>	5	75.7	37.1	38.6	76.8		Riveted	69.0 (7,035)	95.6 (9,750)	14.1 (1,440)	3.16	
<b>RS 40-6</b>	6	90.1	44.3	45.8	91.2		Riveted	82.8 (8,442)	115 (11,700)	16.7 (1,700)	3.79	

## RS50-PITCH 15.875 mm

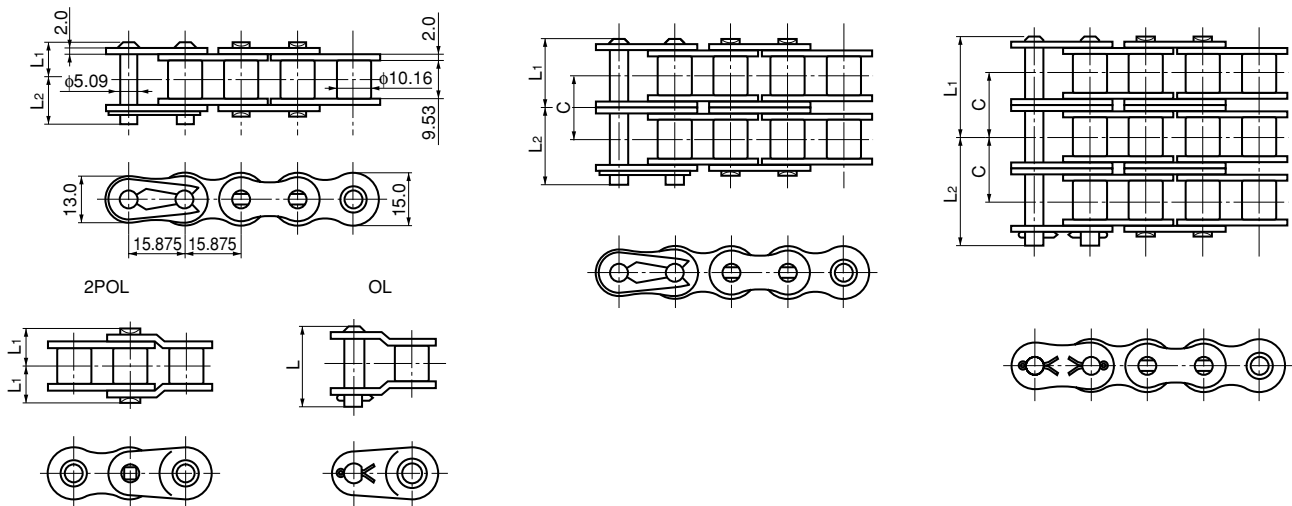

(Dimensions in mm)

TSUBAKI Chain No.	Number of Strands	Pin				Transverse Pitch C	Standard Type of Pin	Min. Ultimate Strength ANSI Standard kN(kgf)	Ave. Tensile Strength kN(kgf)	Max. Allowable Load kN(kgf)	Approx. Mass kg/m	No. of Links/Unit
		L1 + L2	L1	L2	L							
<b>RS 50</b>	1	22.3	10.3	11.9	22.5	18.1	Riveted	24.0 (2,447)	31.4 (3,200)	6.37 (650)	1.04	192
<b>RS 50-2</b>	2	40.5	19.35	21.15	41.8		Riveted	48.0 (4,895)	62.8 (6,400)	10.7 (1,100)	2.07	
<b>RS 50-3</b>	3	58.6	28.4	30.2	59.9		Riveted	72.0 (7,342)	94.1 (9,600)	16.0 (1,630)	3.09	
<b>RS 50-4</b>	4	76.7	37.45	39.25	78.1		Riveted	87.2 (8,892)	126 (12,800)	21.1 (2,150)	4.11	
<b>RS 50-5</b>	5	94.8	46.5	48.3	96.2		Riveted	109.0 (11,115)	157 (16,000)	24.9 (2,540)	5.14	
<b>RS 50-6</b>	6	113.0	55.6	57.4	114.4		Riveted	130.8 (13,338)	188 (19,200)	29.3 (2,990)	6.16	